



ELIA^{FL}

GEWISS

ELIA has arrived! A new addition to the GEWISS lighting family, designed for **easy replacement**, **quick to install** and **guaranteed for 5 years**. **ELIA FL - Floodlight Led** - is the new range of compact LED floodlights in die-cast aluminium. It's the best solution for indoor or outdoor architectural lighting, combining **quality lighting**, energy savings and low maintenance.

The exclusive advantages of ELIA FL



Replacement

The ELIA FL range offers excellent efficiency/cost, for the replacement of conventional lamps, with fast payback.



Quality warranty

ELIA FL is one of GEWISS' high quality LED luminaire ranges, designed to guarantee maximum reliability and innovation, in terms of individual components and product quality.



Easy installation

The ELIA FL luminaires are available with a bracket or with an optional accessory for pole installation, to offer different kinds of applications or installations.




Wide range

ELIA FL range is available with three optic versions and four different sizes with a variety of luminous flux options, to meet a wide range of lighting design requirements.


Payback example - outdoor project 200lx

- Replacement of 12 traditional luminaires
- Operating Time:
2.000 hours per year
- ROI (Return On Investment):
less than one year and half

Energy cost source: Eurostat 2017

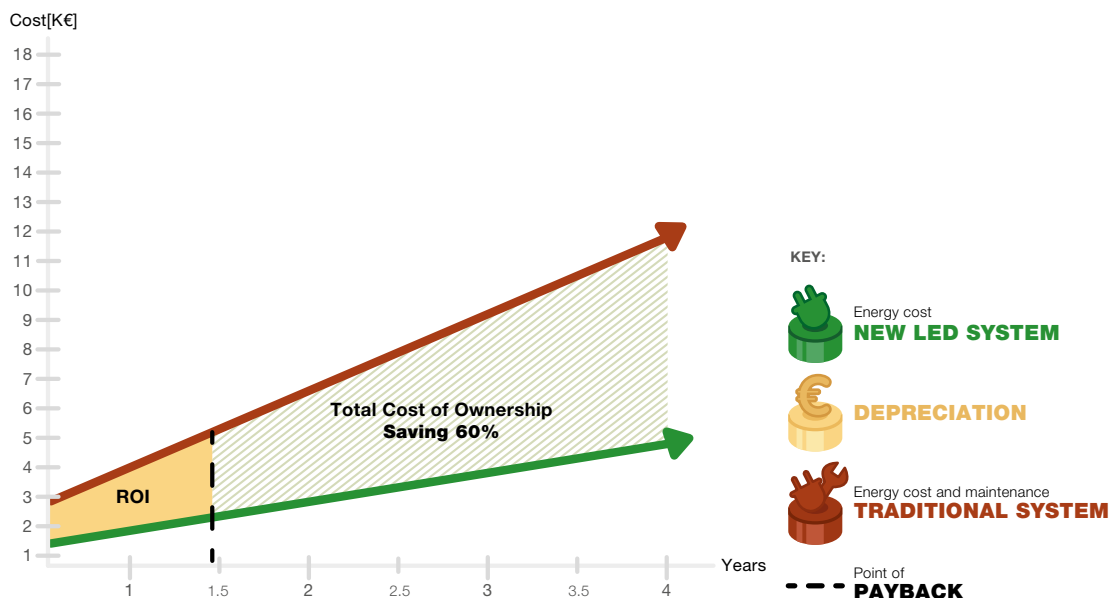


Dimensions




Dimensions	A (mm)	B (mm)	C (mm)	D (mm)
S2	240	222	314	63
M2	330	309	418	77
L2	330	309	451	77
XL2	395	347	494	87


Photometry



Optic 30°



Optic 60°



Asymmetric Optic - AS

Discover the full **ELIA FL** range on www.gewiss.com

Code	Dimensions	Power (W)	Optic	Lumen output (lm)	Colour temp. (K)	Supply
GWF1100GC840	S2	50	AS	6.600	4.000	ON/OFF
GWF1100GF840			30°	6.600		
GWF1100GH840			60°	6.600		
GWF1100MC840	M2	100	AS	13.000	4.000	ON/OFF
GWF1100MF840			30°	13.400		
GWF1100MH840			60°	13.400		
GWF1101MC840			AS	13.000	4.000	DALI
GWF1101MF840			30°	13.400		
GWF1101MH840			60°	13.400		
GWF1100QC840	L2	150	AS	19.600	4.000	ON/OFF
GWF1100QF840			30°	19.900		
GWF1100QH840			60°	20.400		
GWF1101QC840			AS	19.600	4.000	DALI
GWF1101QF840			30°	19.900		
GWF1101QH840			60°	20.400		
GWF1100VC840	XL2	200	AS	26.000	4.000	ON/OFF
GWF1100VF840			30°	26.600		
GWF1100VH840			60°	27.100		
GWF1101VC840			AS	26.000	4.000	DALI
GWF1101VF840			30°	26.600		
GWF1101VH840			60°	27.100		

Technical features

- CRI: 80
- Lifetime: 50.000h (L80 B50) Tq 25°
- Step MacAdam: 5
- Overvoltage protection: ON/OFF 10KV - 6KV, DALI 6KV - 4KV



IP 66

IK 08



CE

