



ELIA^{PL}

GEWISS

ELIA has arrived! A new addition to the GEWISS lighting family, designed for **easy replacement**, **quick to install** and **guaranteed for 5 years**. **ELIA PL – Panel Led** - is the new recessed panel for office and workplace lighting. Luminance and glare control, energy efficiency and comfort are the benefits of this product, for the perfect replacement of traditional lighting installations.

The exclusive advantages of **ELIA PL**



Replacement

The ELIA PL range offers excellent efficiency/cost, for the replacement of conventional lamps, with fast payback.



Quality warranty

ELIA PL is one of GEWISS' high quality LED luminaire ranges, designed to guarantee maximum reliability and innovation, in terms of individual components and product quality.



Easy installation

ELIA PL panels are compact and extremely slimline. Very lightweight and extremely easy and fast to install.



Versatile

ELIA PL is available in three different sizes to be installed in any kind of false ceiling. Thanks to the different mounting accessories, it is the suitable solution to replace any existing installation.


Visit www.gewiss.com and follow us on:




Payback example - office 500lx

- Replacement of 48 traditional luminaires
- Operating Time:
3.500 hours per year
- ROI (Return On Investment):
less than one year and half


Energy cost source: Eurostat 2017

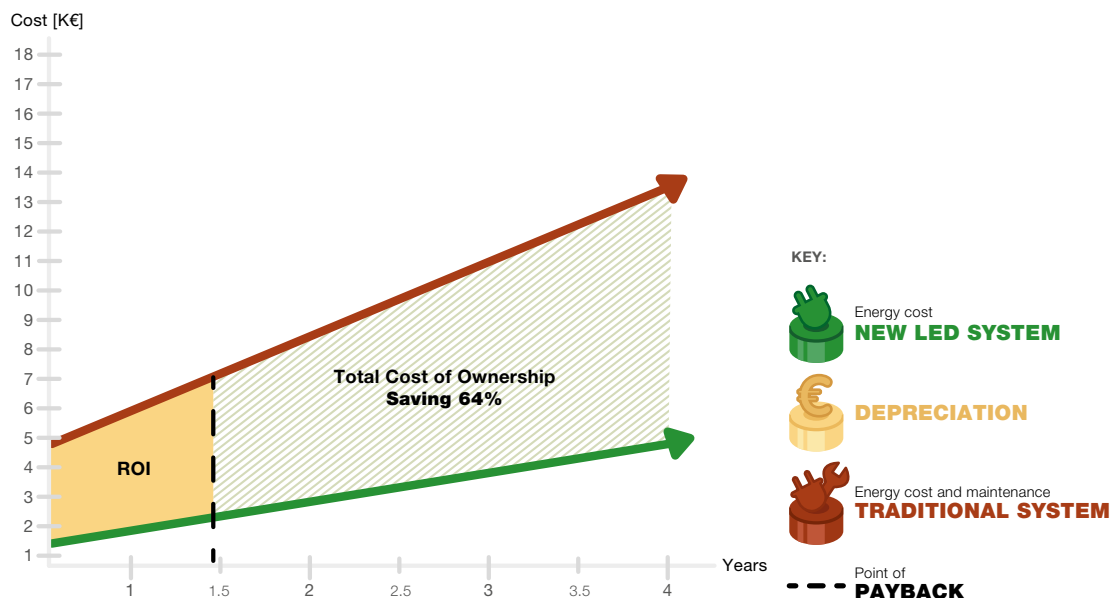

Dimensions

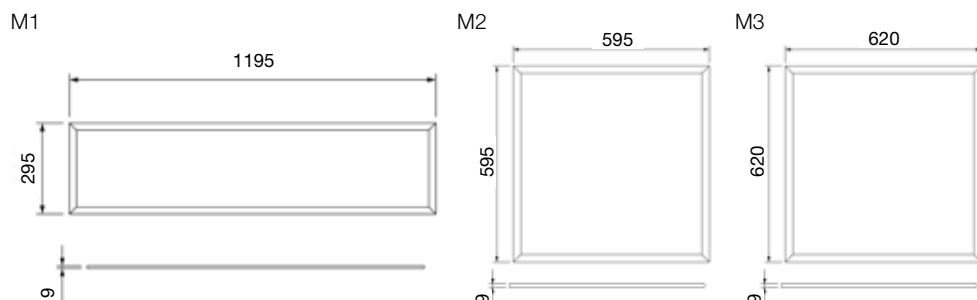

Photometry

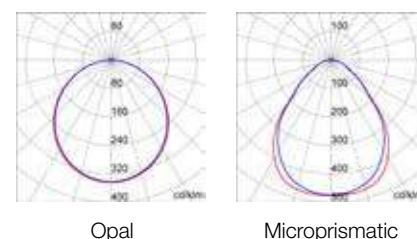

Discover the full **ELIA PL** range on www.gewiss.com

Code - M2	Power (W)	Optic	Lumen output (lm)	CRI	Colour temp. (K)	Supply
GWF1610MA830	33	Opal (UGR <22)	3700	80	3.000	ON/OFF
GWF1610MA840			4000	80	4.000	
GWF1610MA930			3000	90	3.000	
GWF1610MA940			3300	90	4.000	
GWF1611MA830	33	Opal (UGR <22)	3700	80	3.000	DALI
GWF1611MA840			4000	80	4.000	
GWF1611MA930			3000	90	3.000	
GWF1611MA940			3300	90	4.000	
GWF1610MN830	33	Microprismatic (UGR <19)	3700	80	3.000	ON/OFF
GWF1610MN840			4000	80	4.000	
GWF1610MN930			3000	90	3.000	
GWF1610MN940			3300	90	4.000	
GWF1611MN830	33	Microprismatic (UGR <19)	3700	80	3.000	DALI
GWF1611MN840			4000	80	4.000	
GWF1611MN930			3000	90	3.000	
GWF1611MN940			3300	90	4.000	

Technical features

- Dimensions: 600X600 mm (available also: 620X620 mm e 300X1200 mm)
- Lifetime: 50.000h (L80 B50) Tq 25°
- Step MacAdam: 5
- Operating temperature [Ta]: -20° + 45°



Visit www.gewiss.com and follow us on:

