


Data sheet

ID	DE330S
Description	flexible metal conduit
Properties	flexible metal conduit with hooked profile, galvanised steel, without seal, for use as high mechanical protection for electrical cables, high compression resistance, very flexible, tensile strength
Fire Behaviour	non flame propagating
Classification	33414

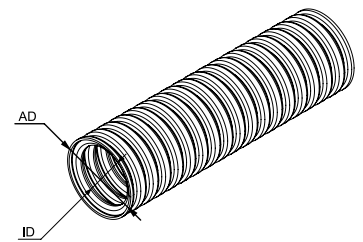

Working temperature	Compressive strength	Degree of protection (IP)	UV-Level
-15 to +60 °C	750 N	IP40	L3

Art. no.	Outer diameter	Inner diameter	Bending radius, static	Small Package	Large Package
005 896	10 mm	8 mm	25 mm	25 m	-
005 899	14 mm	11 mm	34 mm	25 m	-
005 902	16,5 mm	13,5 mm	40 mm	25 m	-
005 904	19 mm	16 mm	45 mm	25 m	-
005 906	21 mm	18 mm	50 mm	25 m	-
005 911	27 mm	23 mm	67 mm	25 m	-
037 889	36 mm	31 mm	90 mm	25 m	-
005 928	45 mm	40 mm	110 mm	25 m	-
080 711	56 mm	51 mm	130 mm	25 m	-

Further technical details

Details	
Sheathing material	Not sheathed
Sealing	No sealing
Surface protection	Galvanized
Material	Stahl, verzinkt

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.