


Data sheet

ID	HFL SW
Description	gland with flange, halogen-free
Colour	black, similar to RAL 9005

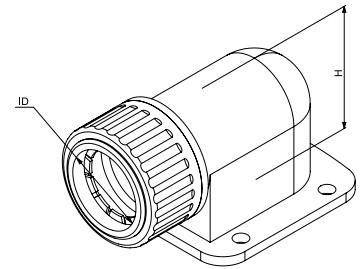

Working temperature
-45 to +150 °C

Degree of protection (IP)
IP54

Art. no.	Nominal diameter	Thread connection size	Thread length	Total length	Small Package	Large Package
020 230	20 mm	M20 x 1.5		65 mm	50 pc	400 pc
016 522	25 mm	M25 x 1.5		75,9 mm	25 pc	300 pc
016 523	32 mm	M32 x 1.5		90 mm	20 pc	160 pc
015 325	40 mm	M40 x 1.5		110,5 mm	10 pc	80 pc
015 324	50 mm	M50 x 1.5		129,3 mm	6 pc	48 pc

Areas of Recommended Application

Area	
Approved in combination with protective conduit CSA	False
Approved in combination with protective conduit UR	False
Approved in combination with protective conduit VD TÜV/GGVS	False
Approved in combination with protective conduit DIN EN 61386-23	False
Approved in combination with protective conduit Lloyd's Register	False

Further technical details

Details	
Model	90°-elbow
Revolving thread	False
Construction type	Flange
Type of connection	Other
Thread type	Metric
Material sealing	No sealing
Material	PPO