


# Data sheet

Part No.	<b>HFSB WH/N</b>
Description	normal bend, halogen-free for the connection of rigid conduits in an angle of 90°, especially für enclosed installations
Colour	white, similar to RAL 9010

Standard: EN 61386-1, EN 61386-21  
halogenfrei according to DIN VDE 0604  
halogenfree according to EN 50642  
halogenfree according to EN 60754

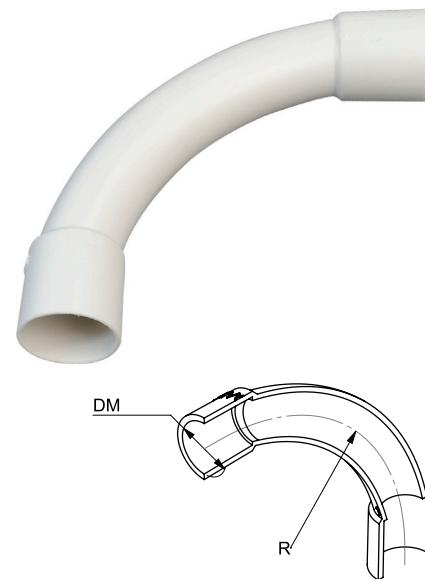

Working temperature  
-25 to +105 °C

UV-Level\*  
L2

Art. no.	For tube diameter	Radius	ps	pl
106 172	16 mm	50 mm	50 pc	600 pc
106 173	20 mm	70 mm	25 pc	300 pc
106 174	25 mm	95 mm	25 pc	200 pc
106 175	32 mm	125 mm	15 pc	120 pc
106 176	40 mm	160 mm	50 pc	1750 pc
106 177	50 mm	210 mm	40 pc	960 pc
106 178	63 mm	270 mm	20 pc	480 pc

## Further technical details

### Details

Model	Plug-in
With inspection opening and cover	False
Angle of bow	90 °
Material	PP-Blend

\*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, [www.dietzel-univolt.com](http://www.dietzel-univolt.com), makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.