


Data sheet

| | |
|-------------|--|
| Part No. | HFSM BK |
| Description | slip type coupler, halogen free for the connection of conduits, suitable for rigid and pliable conduits |
| Colour | black, similar to RAL 9005 |



Standard: EN 61386-1, EN 61386-21
halogenfree according to EN 60754

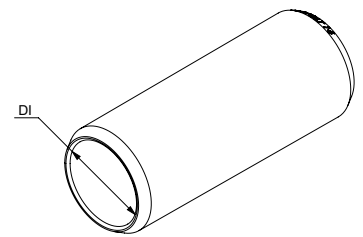

Working temperature
-25 to +90 °C

UV-Level*
L2

| Art. no. | For tube diameter | ps | pl |
|----------|-------------------|--------|---------|
| 020 556 | 16 mm | 100 pc | 1200 pc |
| 020 557 | 20 mm | 100 pc | 800 pc |
| 020 558 | 25 mm | 50 pc | 600 pc |
| 020 559 | 32 mm | 25 pc | 300 pc |
| 020 652 | 40 mm | 25 pc | 200 pc |
| 020 653 | 50 mm | 15 pc | 120 pc |
| 020 654 | 63 mm | 8 pc | 64 pc |

Further technical details

| Details | |
|--------------|----------|
| Halogen free | True |
| Model | Plug-in |
| Material | PC-Blend |

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, www.dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.