


Data sheet

Part No.	HFSM WH
Description	slip type coupler, halogen free for the connection of conduits, suitable for rigid and pliable conduits
Colour	white, similar to RAL 9010

Standard: EN 61386-1, EN 61386-21

halogenfree according to EN 60754

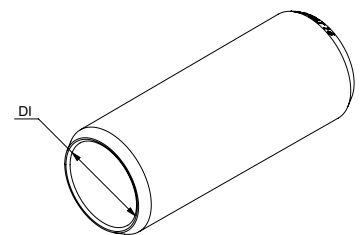

Working temperature
-25 to +90 °C

UV-Level*
L2

Art. no.	For tube diameter	ps	pl
038 571	16 mm	100 pc	1200 pc
037 036	20 mm	100 pc	800 pc
038 572	25 mm	50 pc	600 pc
038 573	32 mm	25 pc	300 pc
038 574	40 mm	25 pc	200 pc
038 575	50 mm	15 pc	120 pc

Further technical details

Details

Halogen free	True
Model	Plug-in
Material	PC-Blend

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequersstraße 3-5, www.dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.