


# Data sheet

ID	<b>HWADW 65 HFT</b>
Description	outlet box, single gang, draughtproof, halogen-free
Properties	mounting screw spacing 60 mm, drilled hole size required $\varnothing$ 68 mm, box rim diameter $\varnothing$ 71 mm, for partition board thickness from 7 to 35 mm, maximum 4 conduit entries $\varnothing$ 20 mm, 2 conduit entries $\varnothing$ 25 mm and 4 cable entries
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating
Usage	for dry lining installations
Classification	400 V, IP 30, H



halogenfrei according to DIN VDE 0604  
halogenfree according to EN 50642  
halogenfree according to EN 60754

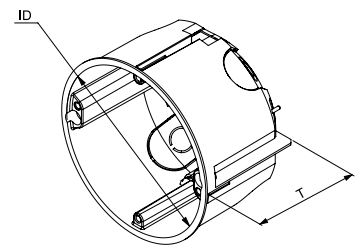

Halogen free

True

Degree of protection (IP)

IP30

Art. no.	Dimensions $\varnothing$ /LxB x T	Small Package	Large Package
103 042	$\varnothing$ 65 x 60 mm	25 pc	200 pc

## Further technical details

Details	
break-out opening	False
seal membrane	True
nozzle	False
step membrane	False
Mounting switching equipment	Screwing
Luminaire hook mounting	False
Nozzle	None
With nail lugs	False
Circuit integrity	None

Details	
Model	Single
Shape	Round
Mounting method	Hollow wall
With screws	True
Provided with revolving ring	False
Connectable	False
Equipped with	None
Cover attachment	Screwed
Material	PP-Blend