


Data sheet

ID	HWDW 65
Description	outlet box, single gang, draughtproof
Properties	mounting screw spacing 60 mm, drilled hole size required \varnothing 68 mm, box rim diameter \varnothing 71 mm, for partition board thickness from 7 to 35 mm, maximum 4 conduit entries \varnothing 20 mm, 2 conduit entries \varnothing 25 mm and 4 cable entries
Colour	orange, similar to RAL 2004
Fire Behaviour	non flame propagating
Usage	for dry lining installations
Classification	400 V, IP 30, H



Norms: ÖVE/ÖNORM EN 60670-22:2007

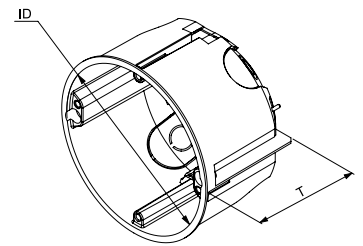

Halogen free
False

Degree of protection (IP)
IP30

Art. no.	Dimensions \varnothing /LxB x T	Small Package	Large Package
100 109	\varnothing 65 x 45 mm	25 pc	250 pc

Further technical details

Details	
break-out opening	False
seal membrane	True
nozzle	False
step membrane	False
Mounting switching equipment	Screwing
Luminaire hook mounting	False
Nozzle	None
With nail lugs	False
Circuit integrity	None

Details	
Model	Single
Shape	Round
Mounting method	Hollow wall
With screws	True
Provided with revolving ring	False
Connectable	False
Equipped with	None
Cover attachment	Screwed
Material	PP-Blend