


# Data sheet

|                |  |
|----------------|--|
| ID             | <b>KM Turbo BK</b>   |
| Description    | grip type coupler, chlorine-free   |
| Properties     | for waterproof and tight connection of pliable conduits especially for use in concrete installation, protection type IP65, extraction resistance 250 N |
| Colour         | black, similar to RAL 9005   |
| Fire Behaviour | non flame propagating  |
| Classification | IP 65  |



Norms: ÖVE/ÖNORM EN 61386-1:2009, ÖVE/ÖNORM EN 61386-22:2012

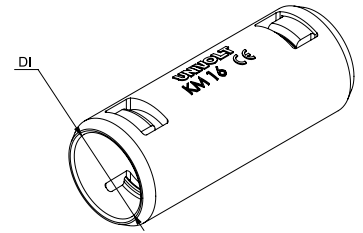

| Art. no. | For tube diameter | ps     | pl      |
|----------|-------------------|--------|---------|
| 085 726  | 16 mm             | 100 pc | 1200 pc |
| 084 051  | 20 mm             | 100 pc | 800 pc  |
| 084 052  | 25 mm             | 50 pc  | 600 pc  |
| 085 926  | 32 mm             | 25 pc  | 300 pc  |
| 102 335  | 40 mm             | 25 pc  | 200 pc  |
| 102 336  | 50 mm             | 15 pc  | 120 pc  |
| 102 337  | 63 mm             | 8 pc   | 64 pc   |

## Further technical details

| Details      |                  |
|--------------|------------------|
| Halogen free | False            |
| Model        | Extraction proof |
| Material     | PE               |