


Data sheet

ID	KSR SW 3M
Description	plain ducting
Properties	rigid ducting, plain, with moulded-on coupler medium compression resistance, normal impact resistance
Colour	black, similar to RAL 9005
Fire Behaviour	non flame propagating
Classification	N 450



Norms: ÖVE/ÖNORM EN 61386-1:2009, ÖVE/ÖNORM EN 61386-24:2011

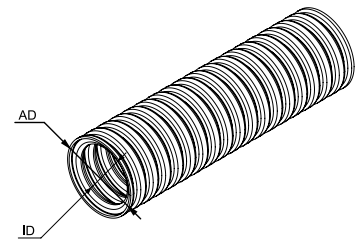

Length	Operating temperature	UV-Level
3 m	-5 bis +60 °C	L2

Art. no.	Inner diameter	Outer diameter	Small Package	Large Package
001 729	46,2 mm	50 mm	3 m	1419 m
001 730	58,6 mm	63 mm	3 m	891 m
001 731	69,9 mm	75 mm	3 m	654 m
001 732	84,2 mm	90 mm	3 m	414 m
001 733	103,4 mm	110 mm	3 m	285 m
001 734	117,6 mm	125 mm	3 m	204 m
001 736	150,6 mm	160 mm	3 m	117 m

Further technical details

Details	
Model	Rigid
Shape	Outer - and inner side plain
Surface protection	Untreated
Transparent	False
Material	PVC-U

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.