


Data sheet

ID	MAK WS
Description	maxi trunking
Properties	Cable routing system for all kinds of electrical installations and telecommunication systems (telephone, EDP, TV, IT etc.) in residential and industrial buildings, offices, garages, hotels, schools and kindergartens; special clip-on system for robust connections between trunking body and lid (shock- and child-proof).
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating



Norms: EN 50085, BS 4678 Part 4

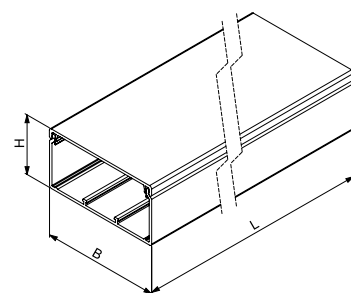

Length	Number of covers	Number of plug-in partitions
3000 mm	1	2

Art. no.	Width x Depth	Useful cross section	Small Package	Large Package
036 996	50 x 50 mm	2500 mm ²	3 m	12 m
019 007	75 x 50 mm	3750 mm ²	3 m	12 m
036 997	100 x 50 mm	5000 mm ²	3 m	12 m
022 788	150 x 50 mm	7500 mm ²	3 m	6 m
019 008	75 x 75 mm	5625 mm ²	3 m	12 m
019 010	100 x 75 mm	7500 mm ²	3 m	6 m
022 953	150 x 75 mm	11250 mm ²	3 m	6 m
019 011	100 x 100 mm	10000 mm ²	3 m	6 m
022 789	150 x 100 mm	15000 mm ²	3 m	84 m
022 790	150 x 150 mm	22500 mm ²	3 m	60 m

Further technical details

Details

Covers supplied with the product	True
Symmetric	True
Construction type	rectangular
Halogen free	False
Surface protection	Untreated
Construction rear wall (inner side)	Continuous C-profile
Protection film	False
With duct connector	False
Mounting perforation in base	False
Mounting method covers	Spanned
With cable fixing clip	False
Material	PVC-U