


Data sheet

ID	SIE WS
Description	internal angle
Properties	for Starline-trunking SLS
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating

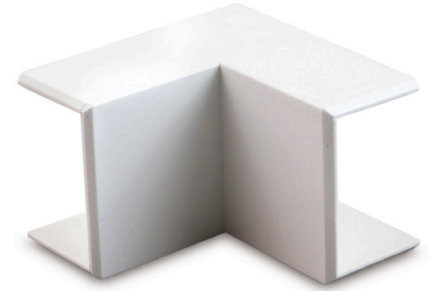

Angle	UV-Level
90 °	L2

Art. no.	Height x Width	Small Package	Large Package
036 057	50 x 170 mm	1 pc	20 pc
086 012	50 x 250 mm	1 pc	20 pc

Further technical details

Details

Model	Moulded hood
Protection film	False
Type of fastening	Snap on
Suitable for circuit integrity	False
Halogen free	False
Material	PVC-U

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.