


Data sheet

Part No.	SLN GY
Description	lock nut, halogen-free for fixing of conduit glands, with metric thread according to EN 60423
Colour	grey, similar to RAL 7001
Fire Behaviour	non flame propagating



Standard: EN 61386-1, EN 61386-23, EN 60423
halogenfree according to EN 60754

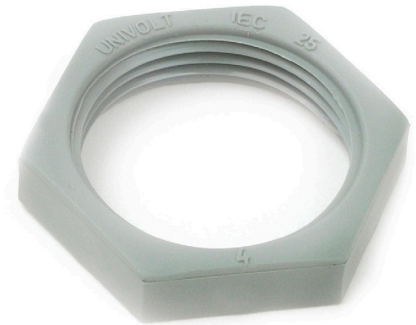

Working temperature
-25 to +105 °C

UV-Level*
L2

Art. no.	Part No.	Nominal thread size	ps	pl
081 534	SLN 12 GY	M 12	100 pc	-
014 206	SLN 16 GR	M 16	200 pc	8000 pc
013 277	SLN 20 GR	M 20	200 pc	6400 pc
013 278	SLN 25 GR	M 25	100 pc	4000 pc
013 279	SLN 32 GR	M 32	100 pc	2400 pc
015 916	SLN 40 GR	M 40	30 pc	1200 pc
017 307	SLN 50 GR	M 50	25 pc	1000 pc
027 589	SLN 63 GR	M 63	20 pc	480 pc

Further technical details

Details

Thread type	Metric
Pitch thread	1,5 mm
Shape	Hexagonal
Halogen free	True
Glass-fibre reinforced	False
Shock resistant	False
Material	PA-Blend

*) L1: Indoor use - to avoid UV discoloration (no exposure to direct sunlight).

L2: Partially shaded: Outside, in areas with sun only for two to four hours a day, in shadowy places.

L3: Full sun: To be used also in areas with whole-day exposure to sunlight, e. g. roofs, antenna poles or PV panels.

Civil engineering and road construction products marked "L2" have to be laid in the shortest time possible to ensure color fastness and stability.

All figures refer to standardised test samples and are given to our best knowledge but without further commitment. It is Univolt's belief that information set forth in this Data Sheet is accurate, Univolt, Dietzel GmbH, 1110 Wien, 1. Haidequerstraße 3-5, www.dietzel-univolt.com, makes no warranty, expressed or implied, with respect thereto and disclaims any liability from reliance thereon. All data are subject to change without prior notice.