


PCE data sheet

article#	8430v
article description	Panel mounted safety socket Design / DIN 49440 IP44 (white)
description long	Panel mounted safety socket Design / DIN 49440 IP44 (white) housing material: PC/ABS rated current: 16A number of poles: 3 (2P+PE) rated voltage/frequency: 250V~ / 50+60Hz contacts: brass nickel plated connection technology: screwless terminals color: white (similar to RAL 9016) for installation in cable trunking hinged lid with inscription field (optional: key lock) IP protection class: IP44
GTIN (EAN)	9003399672392
country of origin	AT
customs number	85366990
net weight	0.186 kg
packaging quantity	6
minimum order quantity	6

ETIM 7.0	EC001318
Current supply	Protective contact (SCHUKO)
Number of poles	3
Voltage acc. EN 60309-2	230 V (50+60 Hz) blue
Identification colour	Blue
Construction type	Equipment mounted socket outlet (under plaster)
Configuration	Cover with text label
Colour	White
RAL-number	9016
Contact material	CuZn
Surface finish contacts	Nickel-plated

wire flexible	1-2x2,5 mm ²
wire solid	1-2x2,5 mm ²
dismantling length	50 mm
stripping length	8-14 mm

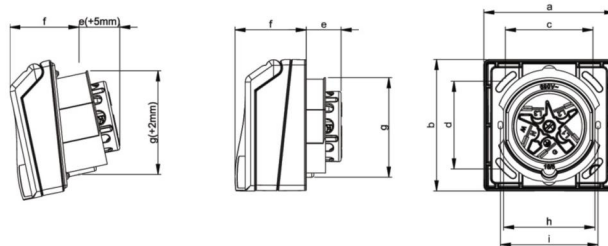

www.manufacturer-safety.info